

C2COM-3

3 COM Port Control Card

The C2COM-3 installs in any Y-Bus expansion slot of a 2-Series control system to provide three bi-directional RS-232/422/485 ports with hardware handshaking.

SPECIFICATIONS

Connectors

COM A - C : (3) DB9 male, bidirectional RS-232/422/485 ports;
Up to 115.2k baud, hardware and software handshaking support

Power Requirements

Cresnet Power Usage: 3 Watts (0.125 Amps @ 24 Volts DC)

Environmental

Temperature: 41° to 113°F (5° to 45°C)

Humidity: 10% to 90% RH (non-condensing)

Construction

Y-bus expansion card, occupies (1) Y-bus card slot in a 2-Series control system

Dimensions

Height: 0.98 in (2.49 cm)

Width: 5.00 in (12.70 cm)


Depth: 6.78 in (17.21 cm)

Available Models

C2COM-3: 3 Port RS-232/422/485 Card for Y-Bus Expansion Slot

Available Accessories

CNSP-XX: Custom Serial Interface Cable

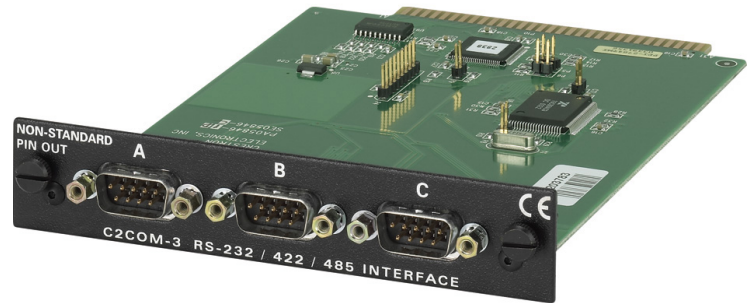

C2COM-3 3 COM Port Control Card

